


AUTOMATIC DIECUTTING & CREASING MACHINE

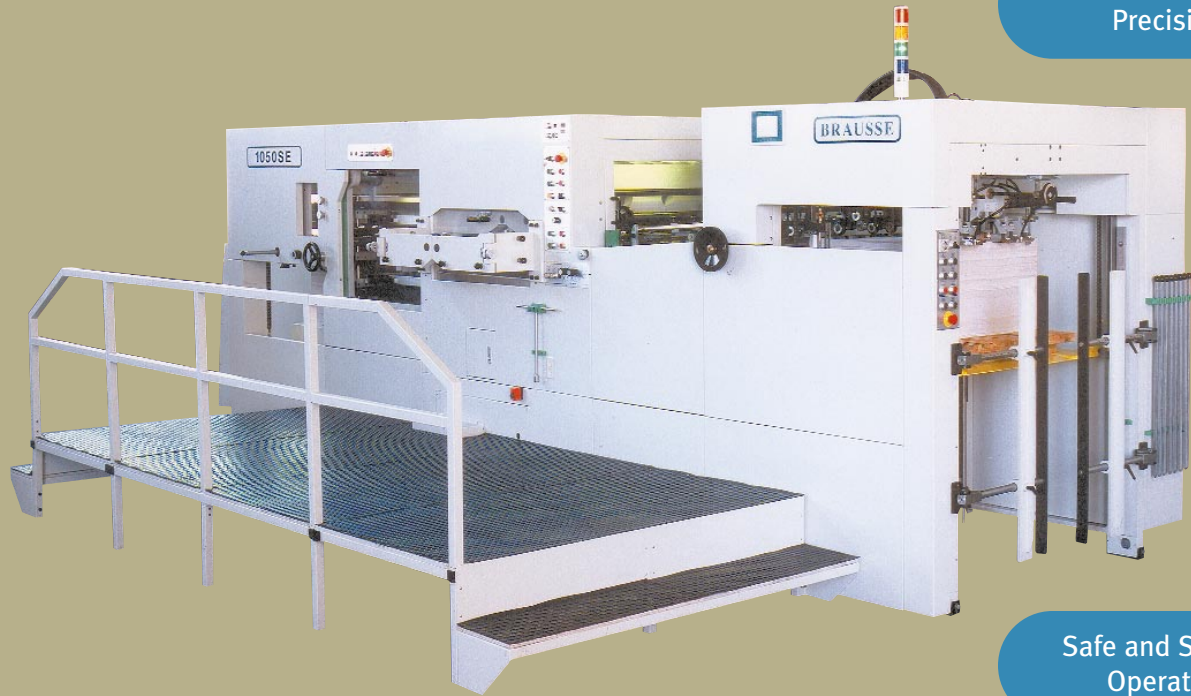

Heavy Duty
Mechanical Design

Microprocessor
Technology

Exact Tolerance
Precision

Safe and Smooth
Operation

High Quality
and Reliable

Competitive Price
Excellent Value

OUTSTANDING FEATURES

- New style feeder head (with 4 forwarding suckers on 1050SE and 6 forwarding suckers on 1300SE) for accurate feeding of various types and even difficult stock, all adjustments can be made on the run.
- Non-stop feeder with motorized side shift and non-stop delivery with counter and tape inserter to ensure continuous productivity.
- The slow down device on feed board allows sheet to enter head stopper at a greatly reduced speed to ensure excellent register when running thinner weight stock.
- Microprocessor assisted monitoring and self-diagnosis system for safe operation and easy maintenance. Control system with LCD screen display provides information of each section to facilitate operation and trouble shooting.
- Triple action stripping station with gripper edge removal device further enhances productivity.
- The slow down brush and double air bar system at delivery can all be adjusted on the run, and all can be turned off and on while the machine is in "RUN" mode; the sheet push down device on 1300SE ensures proper stacking of larger sheets.


1050 SE
high performance
diecutting & stripping

1300 SE
high performance with stripper


ADDED FEATURES ON 1300SE

- Large digital display for left and right head stops adjustment.
- Pneumatic chase locking system to eliminate moving mechanical parts.
- The side guide angle adjustment ensures a perfect 90° angle between the side guide and front lays at all time.
- A special gripper bar leveling device at cutting station is used to ensure that the gripper bar will be held perfectly level while the sheets are in the cutting station.


Hardening aluminum alloy feeding rollers ensure running thinner stock at higher speed




Non-stop delivery with tape inserter



Triple action stripping station



Non-stop feeder with pre-loading device, also taking pallet right off the press



Control system with LCD screen display



SPECIFICATIONS

1050 SE

1300 SE

Max. sheet size	1050 x 750 mm (41 1/8" x 29 1/2")	1300 x 950 mm (51 1/8" x 37 1/2")
Min. sheet size	400 x 370 mm (15 3/4" x 14 1/2")	600 x 450 mm (23 5/8" x 17 3/4")
Max. cutting size	1041 x 730 mm (41" x 28 3/4")	1290 x 940 mm (50 3/4" x 37")
Min. gripper margin	9 mm (23/64")	9.5 mm (3/8")
Inner chase size	1145 x 755 mm (45" x 29 3/4")	1420 x 958 mm (56" x 37 3/4")
Size of cutting plate	1080 x 736 mm (42 1/2" x 29 3/8")	1328 x 940 mm (52 1/4" x 37")
Stock range	.01 - 2 mm (0.0039" - 0.078")	0.1 - 2 mm (0.0039" - 0.078")
Max. pressure	300 tons	500 tons
Max. mechanical speed	7,500 cycles/hour	6,000 cycles/hour
Main motor	11 kw (29 Amp)	15 kw (39.5 Amp)
Other power required	9 kw (24 Amp)	12 kw (31.5 Amp)
Overall length	7018 mm (23')	8088 mm (26' 6")
Overall width	4189 mm (13' 9")	4482 mm (14' 8")
Overall height	1967 mm (6' 5 1/2")	2244 mm (7' 4")
Total weight	15.5 tons	20 tons

In the interest of product improvement, the manufacturer reserves the right to change specifications and features without notice.

MANUFACTURER



DISTRIBUTOR



HEADQUARTERS

#1 - 1500 Valmont Way
Richmond, British Columbia
Canada, V6V 1Y4
Tel: (604) 278-2027
Fax: (604) 278-1005
E-mail: printech@sprint.ca

NORTHERN OFFICE

#14 - 7700 68th Avenue North
Brooklyn Park, MN
55428 U.S.A.
Tel: (763) 535-5885
Fax: (763) 535-6660
E-mail: north@brausse.com

EASTERN OFFICE

476 Bergen Blvd., Suite 2B
Ridgefield, NJ
07657 U.S.A.
Tel: (201) 941-1199
Fax: (201) 941-0738
E-mail: east@brausse.com

SOUTHERN OFFICE

13010 Profit Row
Forney, TX
75126 U.S.A.
Tel: (972) 552-2914
Fax: (972) 552-9825
E-mail: south@brausse.com